


Bending and Shear in Simple Beams

Part 2

- Diagrams by Areas (Semi-graphical)
- Diagrams by Equations
- Examples in Form (catenary curves)

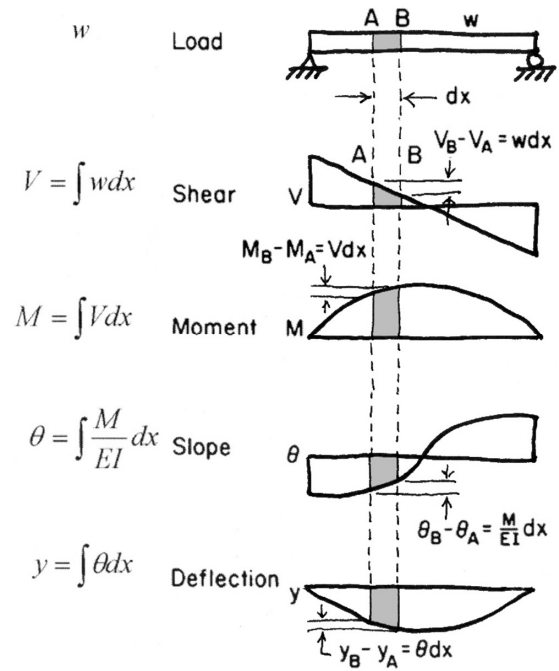


3. Shear and Moment by Semi-graphical Method – diagram relationships

By recognizing the diagrammatic relationships between curves and their derivatives and integrals, shear and moment diagrams can be constructed based on areas and slopes of those curves.


Moving from Upper to Lower Diagrams:

- The area between any two points on the upper diagram is equal to the change in value between same points on the lower diagram.
- The degree of the curve increases by one for each diagram.
- The value on the upper diagram is equal to the slope of the lower diagram.
- Where the upper diagram crosses 0 on the axis, the lower diagram is at a maximum or minimum.
- Points of inflection or “contraflexure” (between + and – curvature) on the elastic curve (deflected shape) are points of zero moment.

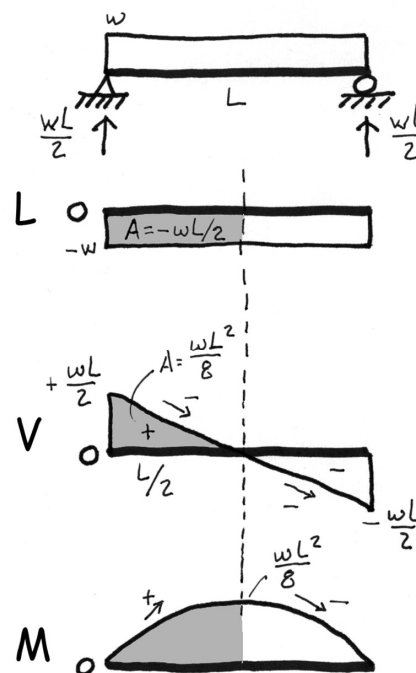

3. Semi-graphical Method


FRACTIONAL AREAS OF ENCLOSURE RECTANGLES

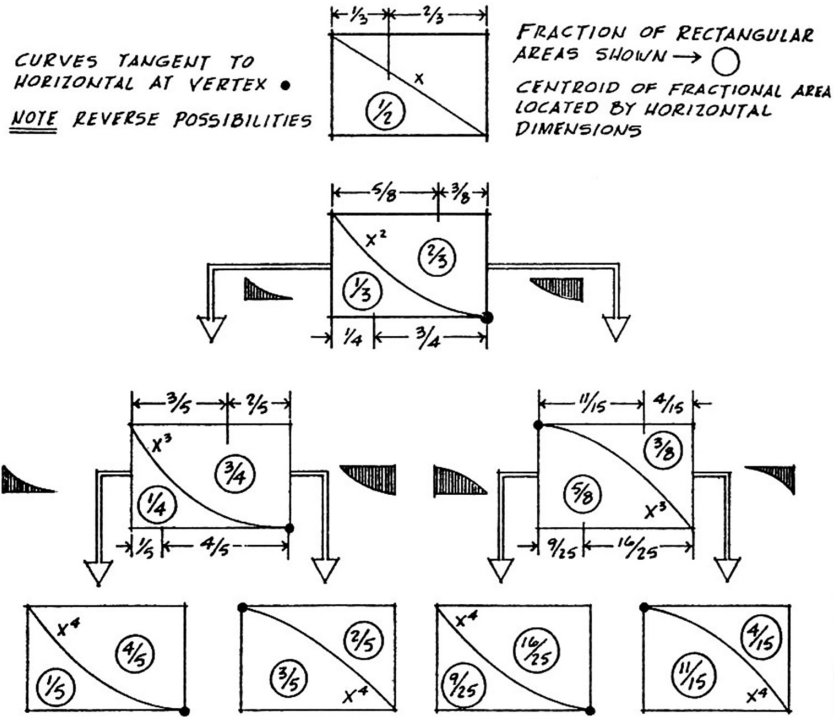

3. Semi-graphical Method

Procedure:


1. Find end reactions
2. Start at left end of V-Diagram and "apply" load from left to right
3. Calculate areas of V-Diagram
4. Find max. and min. values on M-Diagram using V-Diagram areas between axis crossings.
5. Check slope and + or - values

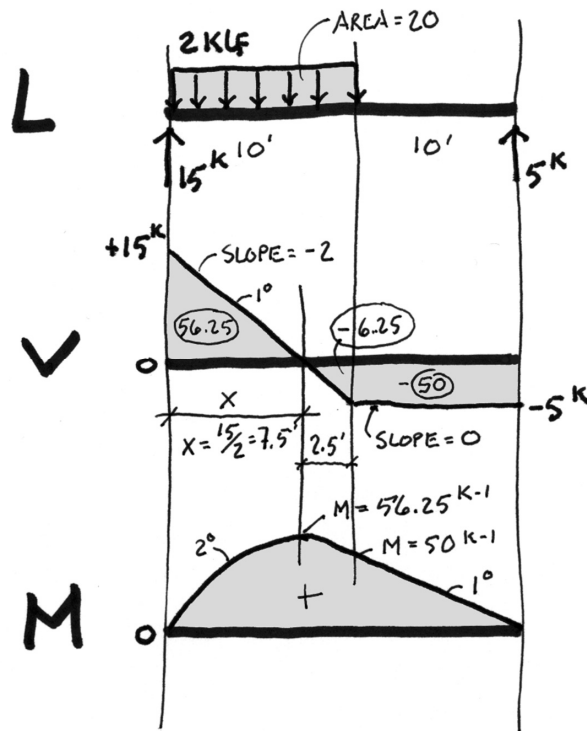

3. Semi-graphical Method

example


Cantilever Beam

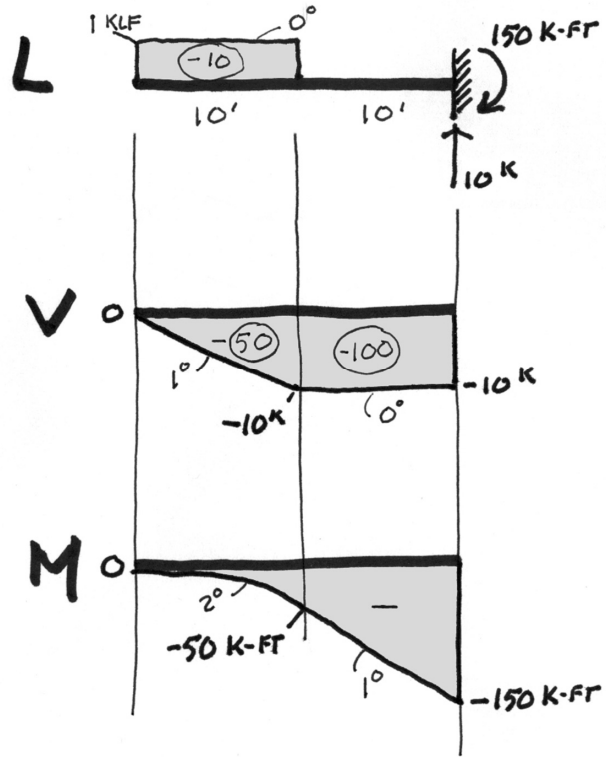

3. Semi-graphical Method

example


Beam with cantilever

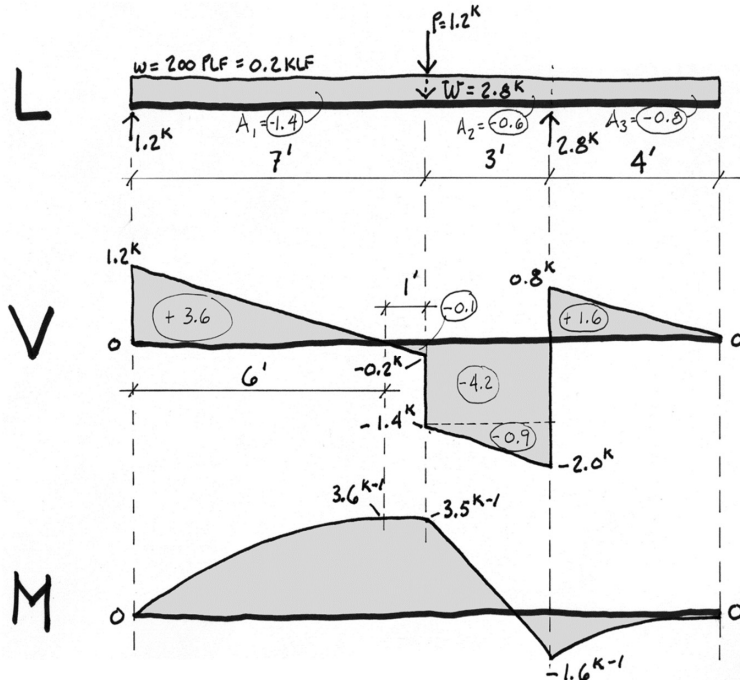


3. Semi-graphical Method

example

Simple beam




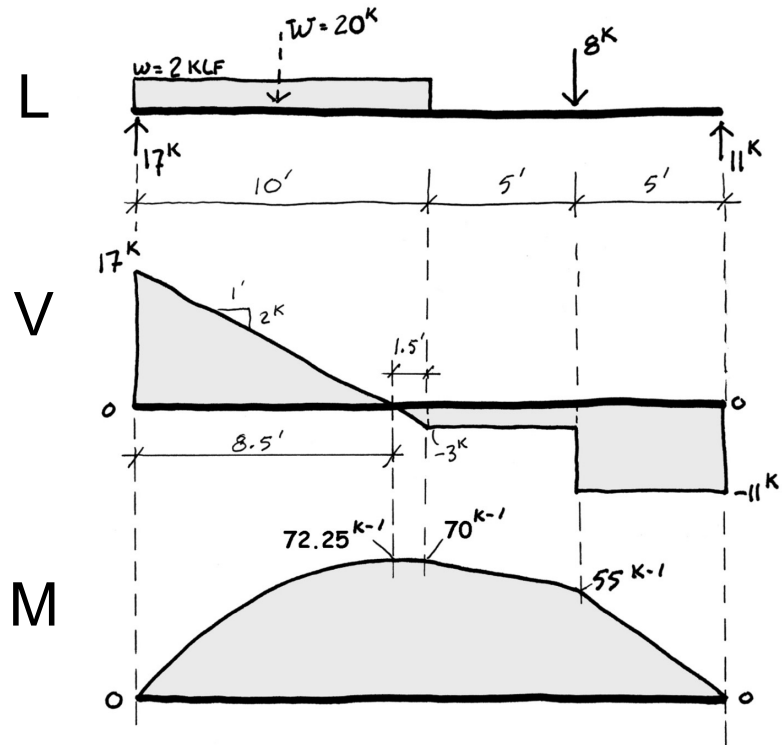


3. Semi-graphical Method - Superposition

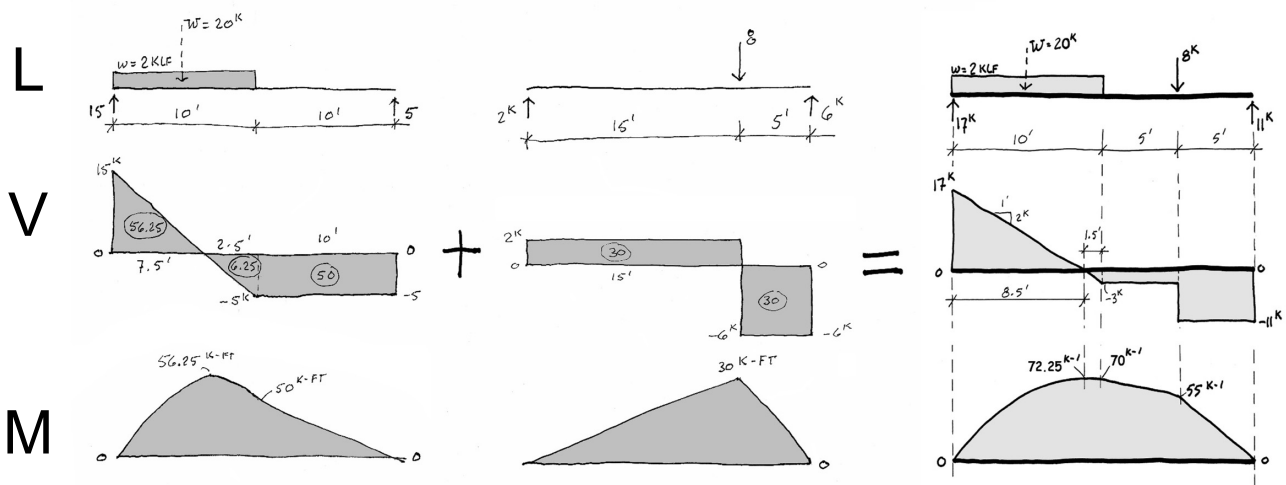

Moment Diagram vs. Catenary Curve

For a gravity loaded simple span beams, the shape of the of the moment diagram is the inverse of the catenary curve.

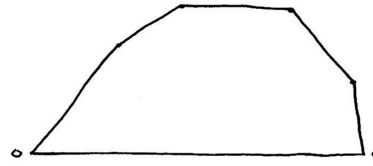

Equations Method

For simple spans:

V_{max} is the larger reaction

For symmetric loadings:

M_{max} is at C.L.

For cantilevers:


Both V_{max} and M_{max} are at the support

In these equations:

w = load per unit length (PLF or KLF)


W = the total load (LB or KIP)

1. SIMPLE BEAM—UNIFORMLY DISTRIBUTED LOAD




$$\begin{aligned} \text{Total Equiv. Uniform Load} &= wl \\ R = V &= \frac{wl}{2} \\ V_x &= w\left(\frac{l}{2} - x\right) \\ M_{\text{max}} \text{ (at center)} &= \frac{wl^2}{8} \\ M_x &= \frac{wx}{2}(l - x) \\ \Delta_{\text{max}} \text{ (at center)} &= \frac{5wl^4}{384EI} \\ \Delta_x &= \frac{wx}{24EI}(l^3 - 2lx^2 + x^3) \end{aligned}$$

2. SIMPLE BEAM—LOAD INCREASING UNIFORMLY TO ONE END



$$\begin{aligned} \text{Total Equiv. Uniform Load} &= \frac{16W}{9\sqrt{3}} = 1.0264W \\ R_1 = V_1 &= \frac{W}{3} \\ R_2 = V_2 \text{ max} &= \frac{2W}{3} \\ V_x &= \frac{W}{3} - \frac{Wx^2}{l^2} \\ M_{\text{max}} \text{ (at } x = \frac{l}{\sqrt{3}} = .5774l) &= \frac{2Wl}{9\sqrt{3}} = .1283Wl \\ M_x &= \frac{Wx}{3l^2}(l^2 - x^2) \\ \Delta_{\text{max}} \text{ (at } x = \sqrt{1 - \frac{8}{15}} = .5193l) &= \frac{0.0130Wl^3}{EI} \\ \Delta_x &= \frac{Wx}{180EI^2}(3x^4 - 10l^2x^2 + 7l^4) \end{aligned}$$

7. SIMPLE BEAM—CONCENTRATED LOAD AT CENTER



$$\begin{aligned} \text{Total Equiv. Uniform Load} &= 2P \\ R = V &= \frac{P}{2} \\ M_{\text{max}} \text{ (at point of load)} &= \frac{Pl}{4} \\ M_x \text{ (when } x < \frac{l}{2}) &= \frac{Px}{2} \\ \Delta_{\text{max}} \text{ (at point of load)} &= \frac{Pl^3}{48EI} \\ \Delta_x \text{ (when } x < \frac{l}{2}) &= \frac{Px}{48EI}(3l^2 - 4x^2) \end{aligned}$$

4. Superposition of Equations

Equations of shear or moment may be combined (superimposed) for any number of cases.


BUT

The appropriate location along the beam for which the equation is valid must be maintained

Thus

At the reaction, $V = P/2 + wL/2$


And at the C.L. $M = PL/4 + wL^2/8$

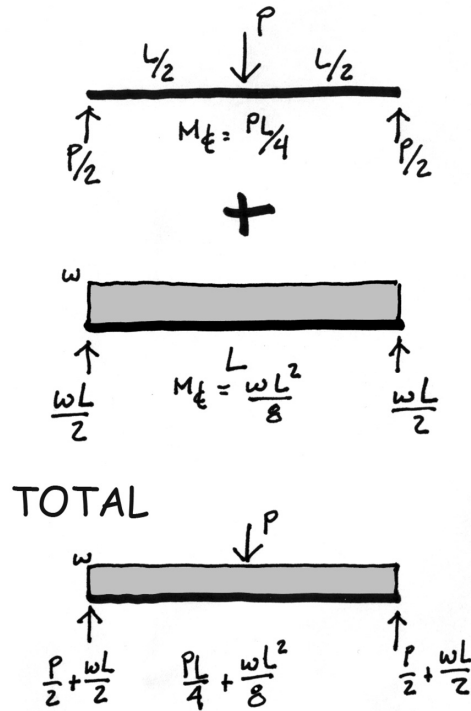

Non-symmetric


For more complex loads, care must be taken to combine equations at the same location or point on the beam (x).

5. SIMPLE BEAM—UNIFORM LOAD PARTIALLY DISTRIBUTED AT ONE END

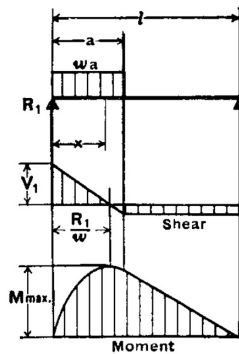

$$\begin{aligned}
 R_1 = V_1 \text{ max.} & \dots \dots \dots = \frac{wa}{2l} (2l - a) \\
 R_2 = V_2 & \dots \dots \dots = \frac{wa^2}{2l} \\
 V_x \text{ (when } x < a) & \dots \dots \dots = R_1 - wx \\
 M \text{ max. (at } x = \frac{R_1}{w}) & \dots \dots \dots = \frac{R_1^2}{2w} \\
 M_x \text{ (when } x < a) & \dots \dots \dots = R_1 x - \frac{wx^2}{2} \\
 M_x \text{ (when } x > a) & \dots \dots \dots = R_2 (l - x) \\
 \Delta x \text{ (when } x < a) & \dots \dots \dots = \frac{wx}{24EI} (a^2(2l-a)^2 - 2ax^2(2l-a) + lx^3) \\
 \Delta x \text{ (when } x > a) & \dots \dots \dots = \frac{wa^2(l-x)}{24EI} (4xl - 2x^2 - a^2)
 \end{aligned}$$

8. SIMPLE BEAM—CONCENTRATED LOAD AT ANY POINT



$$\begin{aligned}
 \text{Total Equiv. Uniform Load} & \dots \dots \dots = \frac{8 Pab}{l^2} \\
 R_1 = V_1 \text{ (max. when } a < b) & \dots \dots \dots = \frac{Pb}{l} \\
 R_2 = V_2 \text{ (max. when } a > b) & \dots \dots \dots = \frac{Pa}{l} \\
 M \text{ max. (at point of load)} & \dots \dots \dots = \frac{Pab}{l} \\
 M_x \text{ (when } x < a) & \dots \dots \dots = \frac{Pbx}{l} \\
 \Delta \text{ max. (at } x = \sqrt{\frac{a(a+2b)}{3}} \text{ when } a > b) & \dots \dots \dots = \frac{Pab(a+2b)\sqrt{3a(a+2b)}}{27EI} \\
 \Delta a \text{ (at point of load)} & \dots \dots \dots = \frac{Pa^2b^2}{3EI} \\
 \Delta x \text{ (when } x < a) & \dots \dots \dots = \frac{Pbx}{6EI} (l^2 - b^2 - x^2)
 \end{aligned}$$

4. Superposition of Equations - example

find x at M_{max} for combined asymmetric cases

(NOTE: VARIABLES DIFFER IN DIFFERENT EQUATIONS)

END REACTIONS

$$R_L = \frac{wL}{2} (2L - a) + \frac{Pb}{L}$$

$$R_L = \frac{2(10)}{2(20)} (2(20) - 10) + \frac{8(5)}{20}$$

$$R_L = 15 + 2 = 17^k$$

MOMENT EQUATIONS AT x

$$M_x = R_L x - \frac{wx^2}{2} + \frac{Pbx}{L}$$

TO FIND x : DIFFERENTIATE AND SOLVE AT 0 (M_{max})

$$R_L - wx + \frac{Pb}{L} = 0$$

$$15 - 2x + 2 = 0$$


$$x = 8.5'$$

AND

$$M_{max} = 15(8.5) - \frac{2(8.5)^2}{2} + \frac{8(5)(8.5)}{20}$$

$$M_{max} = 55.25 + 17 = 72.25^k \cdot l$$

University of Michigan, TCAUP

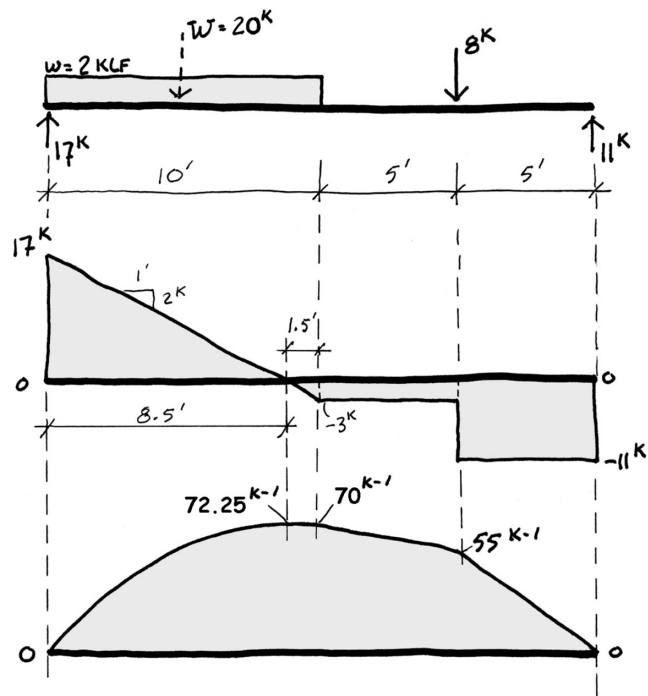


Structures I

Slide 13 of 14

Simple vs. Continuous Beams

- Simple Beam
 - End moments = 0
 - when symmetric, M_{max} at C.L.
 - e.g. $wL^2/8 = 0.125wL^2$
- Continuous Beam
 - Exterior end moments = 0
 - Interior support moments are usually negative
 - Mid-span moments are usually positive
 - End + Mid = $0.125wL^2$

Note: moments shown reversed

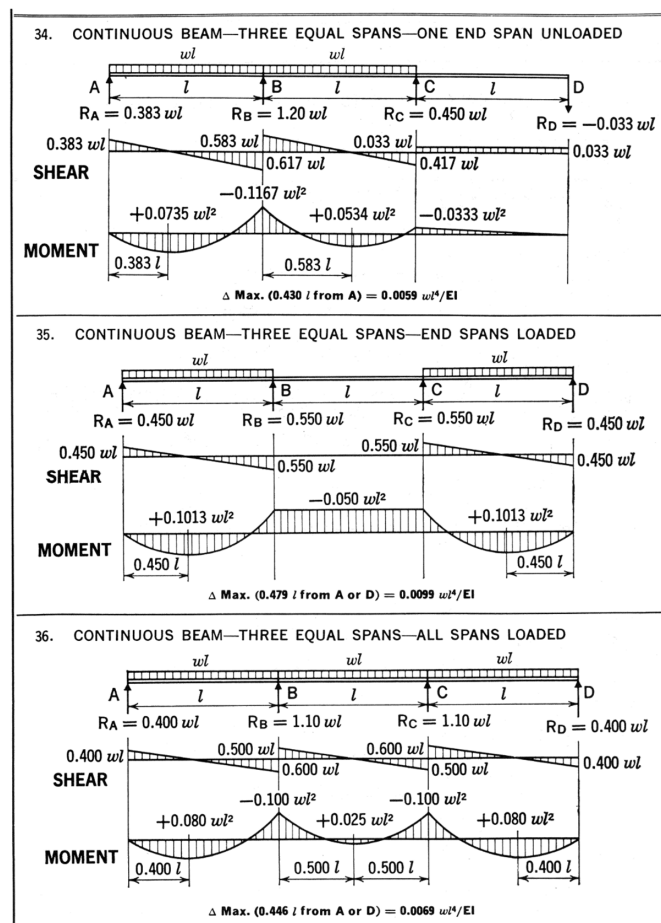

University of Michigan, TCAUP

Structures II

Slide 14 of 14